




Add-on block for residual current protection DIFO

DIFO2



Technical data

Rated voltage U_n	230/400 V AC
Rated current I_n	≤ 32 A ≥ 40 A
Rated frequency f_n	50 / 60 Hz
Rated residual current $I_{\Delta n}$	30, 100, 300 mA
Type of residual current tripping	AC, A
Terminals	1 – 25 mm ² , max. 3 Nm
Terminal screw	M5 (Pozidrive PZ2)
Mounting position	any
Standards	IEC 61009, EN 61009

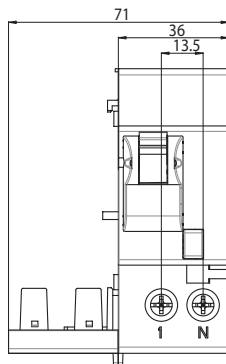

DIFO4

