



RATED VOLTAGE  
~400V


Time/current characteristics of fuse-links Ultra Quick D01 and D02

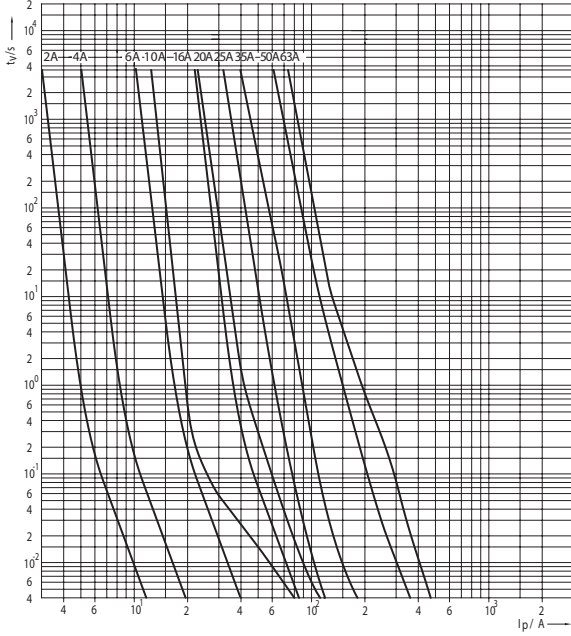

Cut-off characteristics of fuse-links Ultra Quick D01 and D02

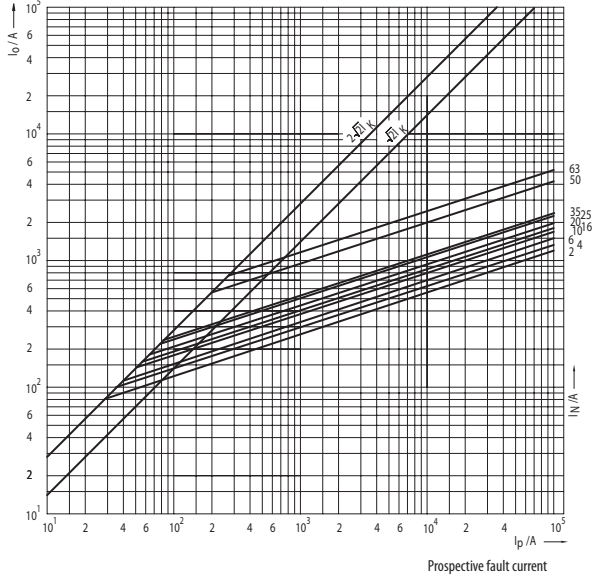

Operating Joule Integral (I<sup>2</sup>t) for Ultra Quick D01 and D02

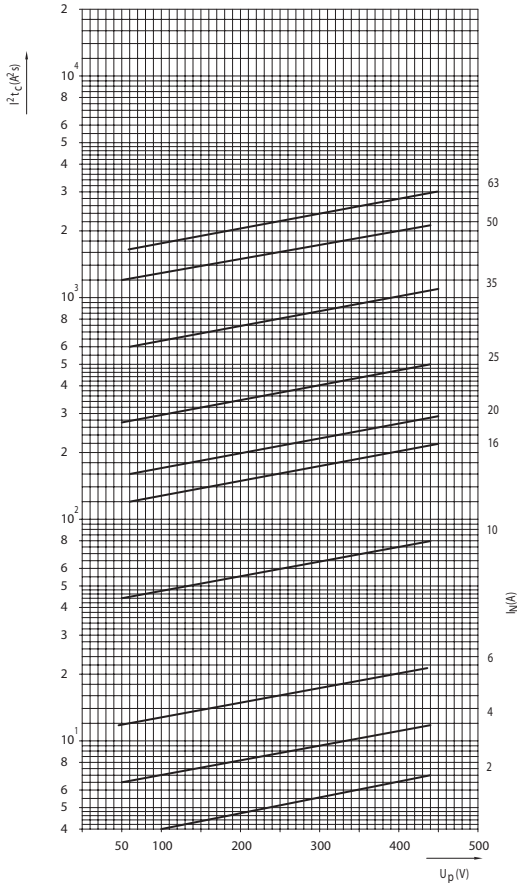

Power dissipation, pre-arcing Joule Integral and Operating Joule Integral for Ultra Quick D01 and D02

I <sub>n</sub>	Power dissipation	Pre-arcing Joule integral I <sup>2</sup> t (1ms)	Operating Joule Integral I <sup>2</sup> t ~100V	Operating Joule Integral I <sup>2</sup> t ~200V	Operating Joule Integral I <sup>2</sup> t ~400V
A	W	A <sup>2</sup> s	A <sup>2</sup> s	A <sup>2</sup> s	A <sup>2</sup> s
2	2,3	1	2,3	4	6,3
4	3,1	2	4,7	8	13
6	4,0	5	7	12	20
10	4,2	12	25	40	65
16	5,3	35	70	100	200
20	8,0	55	120	180	275
25	9,0	85	160	280	480
35	10,0	180	250	450	1.000
50	15,0	250	550	850	1.800
63	17,0	550	800	1.200	2.500